


公差/General tolerances(mm)		公差/General tolerances(mm)	
0	>3	>10	>180
~	~	~	~
3	6	10	18
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±0.93	±1.09	±1.51	±1.60
±2.20	±2.50		
±2			

PCB LAYOUT

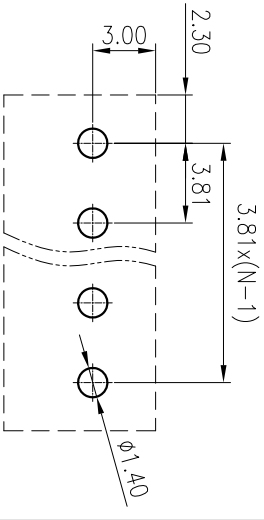

REV	ECN	DESCRIPTION	DRFT	DATE

MATERIAL: /	SURFACE: /
MAT NO.: /	
STATUS: /	
Appd: LanChH 2020.03.23	NAME: DEGSON 宁波高松电子有限公司
CHKD: YUJZh 2020.03.23	NINGBO DEGSON ELECTRICAL CO., LTD
DRFT: ZL 2015.11.18	NAME: 15EDGVC-3.81-XXP-1Y-00A(H)
	DRAWING NO.: 15EDGVC-3.81-C03
	TYPE: CUSTOMER DRAWING
	SCALE: 3:1
	REV T1
	SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	300/8
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级			II/2
额定电压/电流/Rated Voltage(V)/Current(A)			250/7
额定脉冲电压(RV)/Rote Impulse Voltage(KV)			2.5
间距/Pitch(mm)/线数范围/Poles			3.81/N=02~24P
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes