
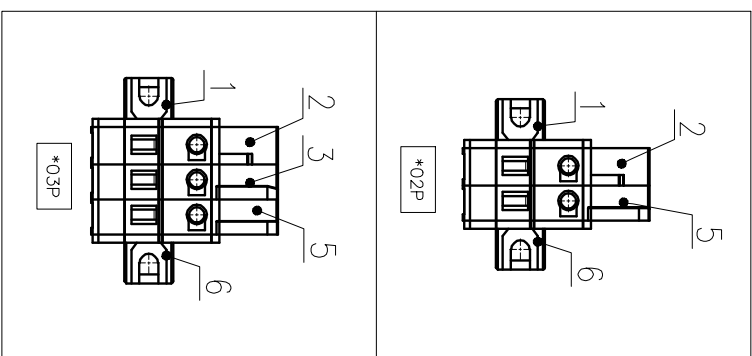
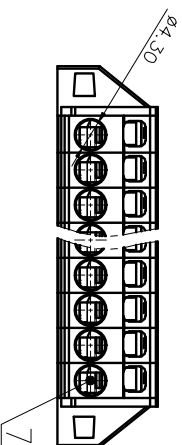
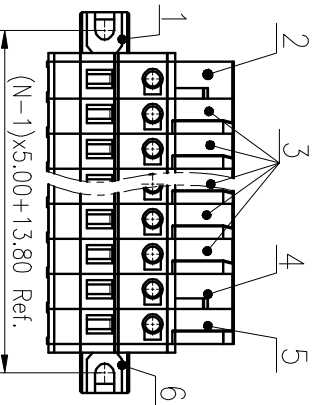



Pitch Range	In		mm		Nominal Dimension		Range		Tolerance
	Over	Under	Over	Under	Over	Under	Over	Under	
6	Over 10	Under 6	Over 30	Under 10	Over 60	Under 30	Over 100	Under 60	0.1/10
TO	TO	TO	TO	TO	TO	TO	TO	TO	≤
6	Over 24	Under 10	Over 60	Under 30	Over 100	Under 60	Over 150	Under 100	±2°
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±1.00	±2°

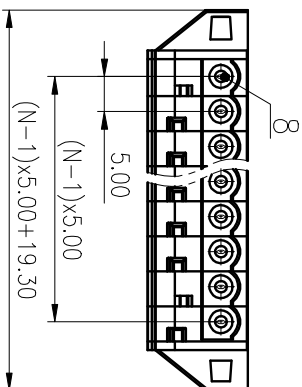

ITEM	NAME OF PART	MATERIAL	NOTES
1	Cover 1	PA66	UL94V-0
2	Side Housing 1	PA66	UL94V-0
3	Middle Housing 1	PA66	UL94V-0
4	Middle Housing 2	PA66	UL94V-0
5	Side Housing 2	PA66	UL94V-0
6	Cover 2	PA66	UL94V-0
7	Spring	Stainless Steel	
8	Clamp	Copper alloy	Sn Plated

UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/2
额定电压/电涌 / Rated Voltage(V)/Current(A)	320/20	/	/
额定脉冲电压 / Rate Impulse Voltage(kV)	4	/	/
线芯范围 (硬线和软线) / Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/22~14		
剥线长度 / Stripping Length(mm)	5.0/N=02~24P		
使用温度范围 / Operating temperature(°C)	9~10		
符合RoHS环保要求 / Conform to RoHS	-40~+105		
标准颜色 / Standard color	Yes		
标准颜色编号 / Standard color number:	PANTONE 428C		

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: XieZhp 2020.06.15

SIZE: A4

TYPE: CUSTOMER DRAWING

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司

NAME: BEDGKMA-5.0-XXP-11-1001A(H)

DRAWING NO.: BEDGKMA-5.0-1000-C02

SCALE: 1:1

SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE