

精度等级/General	tolerance/(mm)
0	>3
~	>6
3	>10
6	>18
10	>30
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
±Z	±Z


ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing 1	PA66	UL94V-0
2	Housing 2	PA66	UL94V-0
3	Header 1	Copper alloy	Sn Plated
4	Header 2	Copper alloy	Sn Plated
5	Cage	Copper alloy	Ni Plated
6	Screw	Steel	Zn Plated

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/20	/	300/70
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	250/18	/
工频耐电压/Withstanding Voltage(V)/min	/	AC2000	/
拧紧扭矩/Torque Tightening(N·m/Lb·in)	M3, 0.5/4.45		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	1.0~2.5/28~12		
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~48P		
引线长度/Stripping length(mm)	6~7		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS标准/Conform to RoHS	Yes		

MATERIAL:	/
MAT NO.:	T2
STATUS:	/
APPD:	LGL 2020.06.18
CHKD:	MGEK 2020.06.18
DRT:	Agron 2012.10.05
NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
DRAWING NO.:	DG500B-5.08-C05
TYPE:	CUSTOMER DRAWING

NAME:	DG500B-5.0-XXP-1Y-1000A(H)
DRAWING NO.:	DG500B-5.08-C05
TYPE:	CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRT	DATE
1/1				

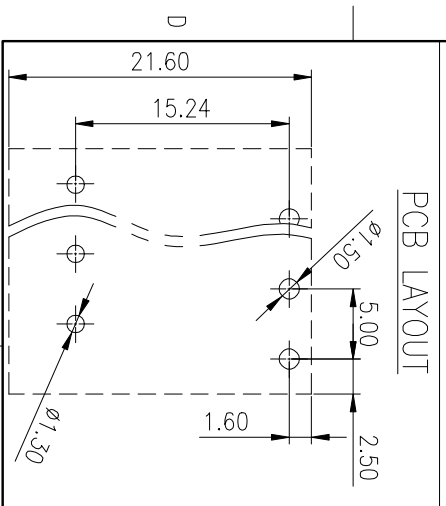

REV	ECN	DESCRIPTION	DRT	DATE
1	2	3	4	5

MATERIAL:	/
MAT NO.:	T2
STATUS:	/
APPD:	LGL 2020.06.18
CHKD:	MGEK 2020.06.18
DRT:	Agron 2012.10.05
NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
DRAWING NO.:	DG500B-5.08-C05
TYPE:	CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRT	DATE
1/1				