

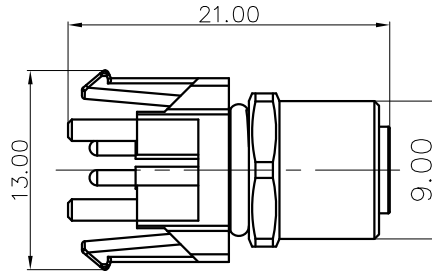


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



SP-M8A-XXP-FF-SF7005-00A(H)

PIN NO.: 03, 04



NOTES:

1. Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
2. Withstanding voltage : 850V
3. Levels of protection: IP67
4. Wire connection mode: soldering(PCB)
5. Operating temperature: -20°C~+80°C
6. For Panel Thickness Max: 1.0~2.5mm
7. RoHS Compliance
8. Tolerance :

.X	±0.25mm
.XX	±0.1mm
∠	±1°

3pin A Coding



4pin A Coding




Pin Assignment Front View

Pin Assignment Front View

Panel mounted



PCB layout



PCB layout

DETACHED LISTS	PART NO.: SPM8AXPFFSF700500AH		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	NAME: SP-M8A-XXP-FF-SF7005-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT:	REV	SHEET	1/1
 THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXX-XX-CXX		SCALE: 1:1
				DO NOT SCALE DRAWING