

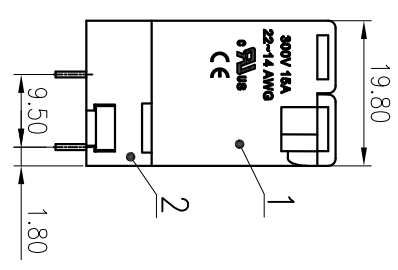
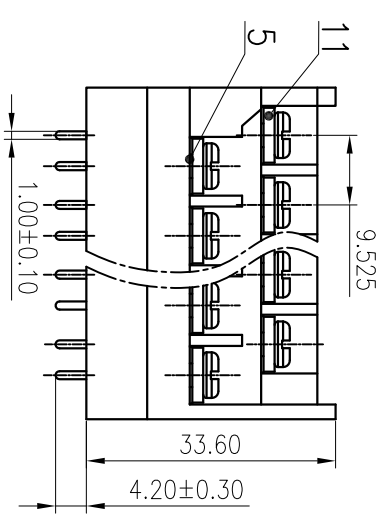
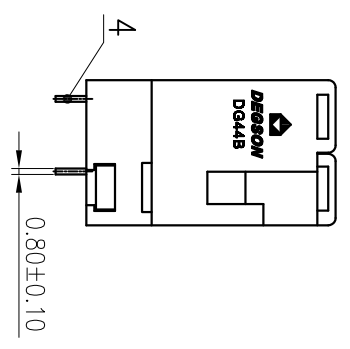


Pitch	Range In mm			Nominal Dimension Range In mm			Range In mm		
	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100	Over 150		
T0	10	10	24	30	60	100	150		0.1/10
6	10	10	24	30	60	100	150		≤
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

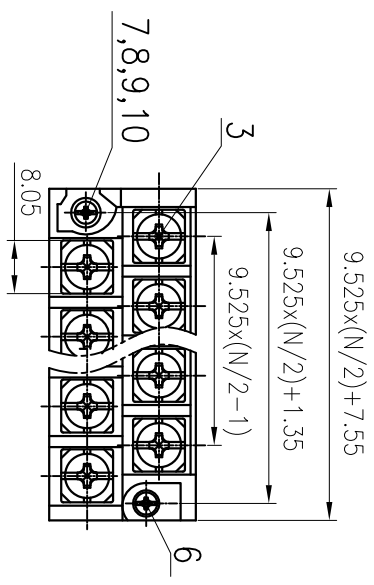

PCB LAYOUT

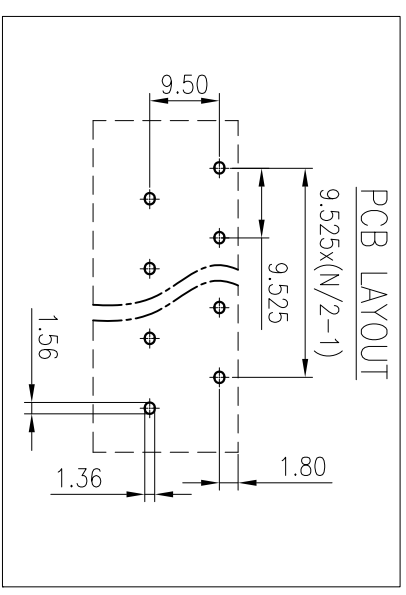

ITEM	NAME OF PART	MATERIAL	NOTES
11	Combination	Steel	Ni Plated
10	Ring	Stainless steel	
9	Gasket	Iron	Ni Plated
8	Screw cap	Copper alloy	Ni Plated
7	Short screws	Steel	Zn Plated
6	Long Screws	Steel	Zn Plated
5	Short pin header	Copper alloy	Au Plated
4	Mid header	Copper alloy	Au Plated
3	Long pin header	Copper alloy	Au Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	320/24	630/32	630/32
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	6	4
额定扭矩/Torque Tightening(N.m/Lb.in)	M3.5, 0.8/7.02		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~2.5/22~14		
间距/Pitch(mm)/线数范围/Poles	9.525/N=10~36P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE: /

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DG44B-1-C01

TYPE: CUSTOMER DRAWING

SCALE: 1:1

SHEET 1/1

DRFT: WJ NK 2020.06.18

REV	ECN	DESCRIPTION	DRFT	DATE