
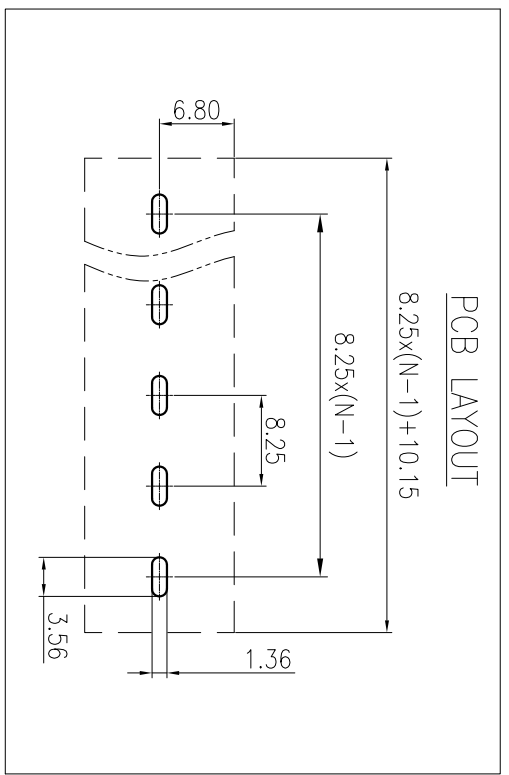
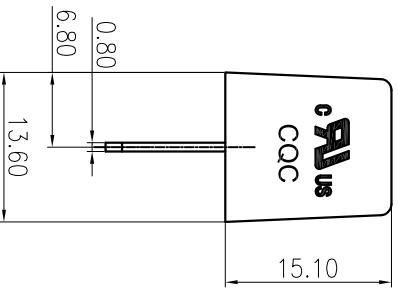


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>18	>30
~	~	~	~
3	6	30	50
~	10	~	~
~	18	~	~
~	30	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/10	0.1/10	0.1/10	0.1/10
±Z	±Z	±Z	±Z

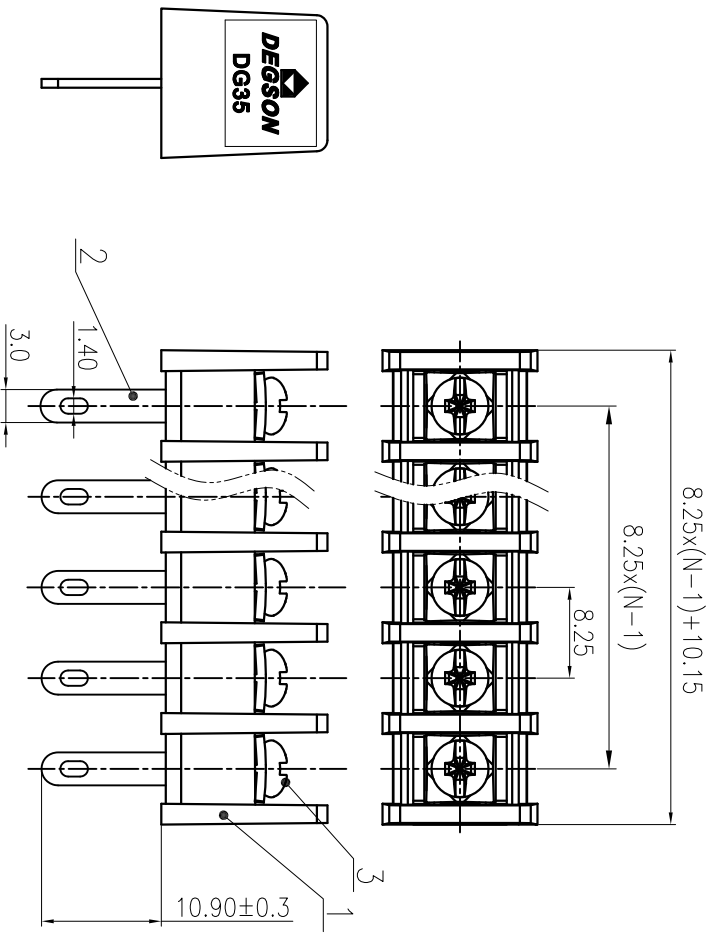

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	M3/Ni Plated
2	Pin header	Copper alloy	M3/Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	/	300/10
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	300/32	300/32	600/32
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	4.0/22~12		
可焊/Pitch(mm)/线数范围/Poles	8.25/N=2~28P		
剥线长度/Stripping length(mm)	8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: CenMZ 2020.05.25

NAME: **DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DG35H-C01

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRAFT	DATE