
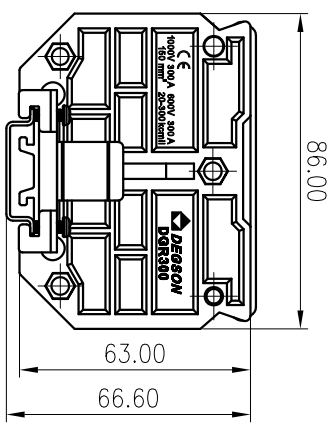
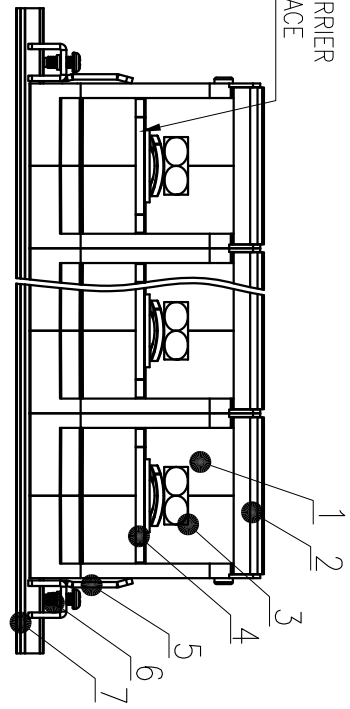


Pitch Range	Over	Over	Over	Over	Over	Over	Over
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2*
	6	10	24	30	60	100	150
	TO	TO	TO	TO	TO	TO	TO
	10	10	24	30	60	100	150
	TO	TO	TO	TO	TO	TO	TO
	6	10	24	30	60	100	150
	TO	TO	TO	TO	TO	TO	TO

(W/O COVER)

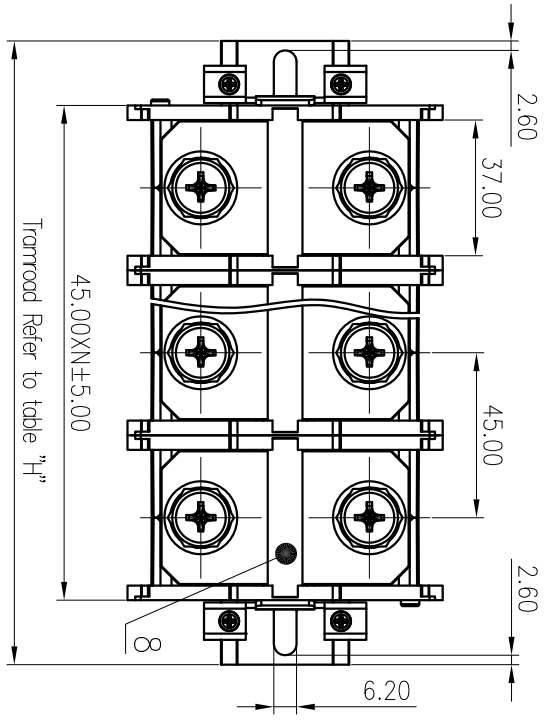

Tramroad Refer to table "H"

POLES(N)	NO. OF PART	L(mm)	POLES(N)	NO. OF PART	L(mm)
08P	6188B08030(H)	395.00±3.00	16P	6188B16030(H)	770.00±3.00
07P	6188B07030(H)	370.00±3.00	15P	6188B15030(H)	720.00±3.00
06P	6188B06030(H)	320.00±3.00	14P	6188B14030(H)	670.00±3.00
05P	6188B05030(H)	270.00±3.00	13P	6188B13030(H)	620.00±3.00
04P	6188B04030(H)	220.00±3.00	12P	6188B12030(H)	595.00±3.00
03P	6188B03030(H)	170.00±3.00	11P	6188B11030(H)	545.00±3.00
02P	6188B02030(H)	145.00±3.00	10P	6188B10030(H)	495.00±3.00
01P	6188B01030(H)	95.00±3.00	09P	6188B09030(H)	445.00±3.00

ITEM	NAME OF PART	MATERIAL	NOTES
8	TAG	PVC	UL94V-0
7	TRAMROAD	STEEL	Zn Plated
6	SCREWS	STEEL	Zn Plated
5	FASTENER	SPCC	Zn Plated
4	CURRENT CARRIER	COPPER ALLOY	Ni Plated
3	SCREWS	STEEL	Zn Plated
2	TRANSPARENT COVER	PC	UL94V-0
1	HOUSING	PC	UL94V-0

UL 标准	UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/300 600/300 600/5			
EC 标准/IEC Standard:				
过电压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2	
额定电压/电流/Rated Voltage(V)/Current(A)	1000/300 1000/300 1000/300			
额定扭矩/Torque Tightening(N·m/Lb.in)	M1.0 9.0/80.00			
绞线范围/Wire Range(Kcmil)	20~300kcmil			
间距/Pitch(mm)/绞线范围/Poles	45.00/N=01~16P			
使用温度范围/Operating Temperature(°C)	-40~+125			
符合RoHS环保要求/Conform to RoHS	Yes			

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: Yujin 2015.03.26

DRAWING NO.: DGR300-C01

TYPE: CUSTOMER DRAWING

SCALE: 1:2

REV	ECN	DESCRIPTION	DRAFT	DATE

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

DGR300-XXP-1Y-00A(H)

REV	ECN	DESCRIPTION	DRAFT	DATE	SCALE	SHEET