
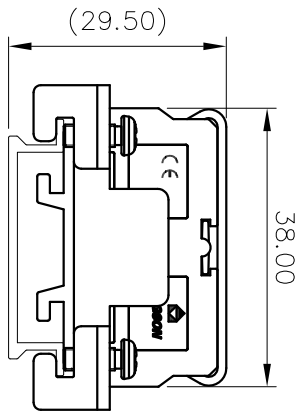
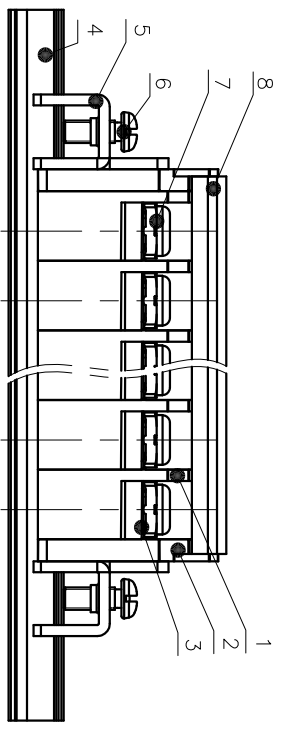


未注公差/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

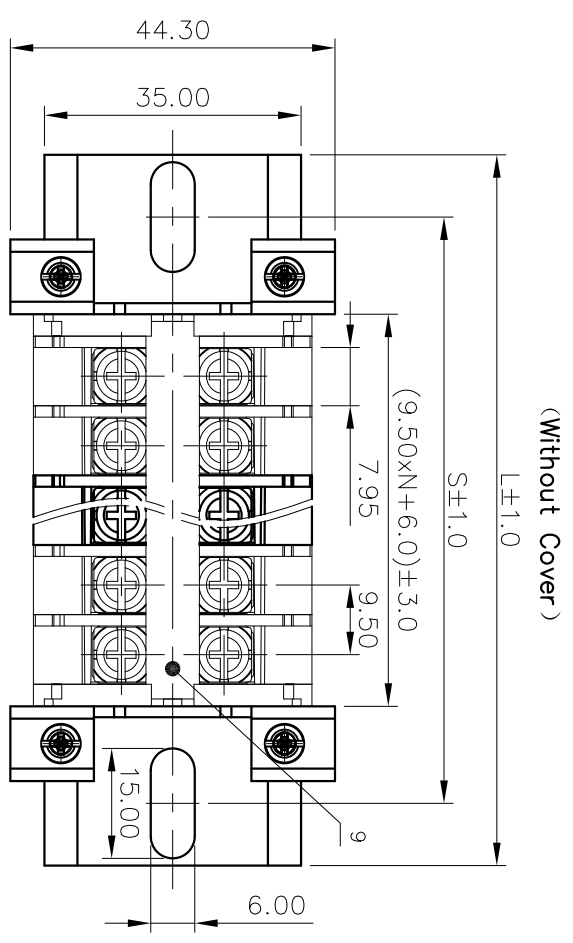

Poles	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
L	57	57	77	77	97	97	117	117	137	137	157	177	177	197	197	
S	40	40	60	60	80	80	100	100	120	120	140	160	160	180	180	

ITEM	NAME OF PART	MATERIAL	NOTES
9	Tag	PVC	/
8	Cover	PC	UL94V-2
7	Screw2	Steel	M3.5/Zn Plated
6	Screw1	Steel	M3/Zn Plated
5	Fastener	Steel	M3/Zn Plated
4	Tramboard	Al	/
3	Current carrier	Copper alloy	Ni Plated
2	Housing2	PC	UL94V-0
1	Housing1	PC	UL94V-0

UL 标准/UL Standard:

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	600/20	600/20	600/5
螺丝扭矩/Torque Tightening(N.m/Lb.in)	M3.5, 0.8/7.02		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	24~12		
间距/Pitch(mm)/线数范围/Poles	9.50/N=01~16P		
使用温度范围/Operating temperature(°C)	-40~+125		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /
SURFACE: /

MAT NO.: /
STATUS: /

APPD: /
CHKD: /

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DGR20-C03
TYPE: CUSTOMER DRAWING

DRFT: CenX 2020.05.18
SCALE: 2:1
REV: D0-1
SHEET: 1/1

REV	ECN	DESCRIPTION	DRFT	DATE