

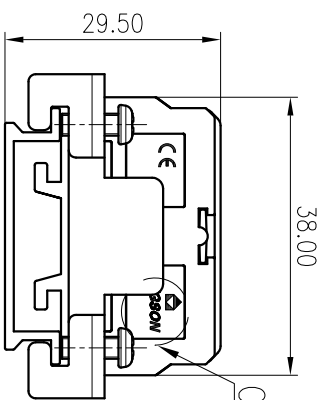
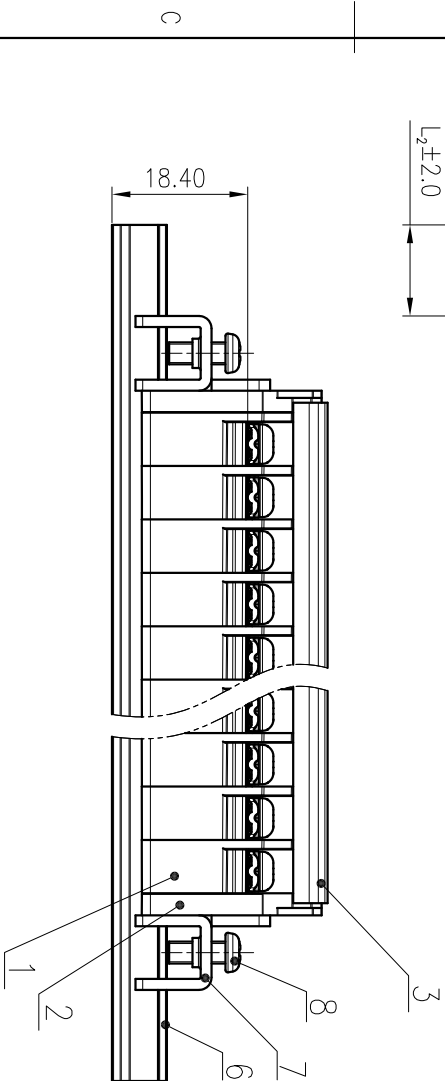


Pitch Range In mm		Nominal Dimension Range In mm							
Over	Over	Over	Over	Over	Over	Over	Over	Over	Over
6	10	10	10	30	60	100	150	150	0.1/10
TO	TO	TO	TO	TO	TO	TO	TO	TO	≤
6	10	24	30	60	100	150	150	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±1.30	±2°

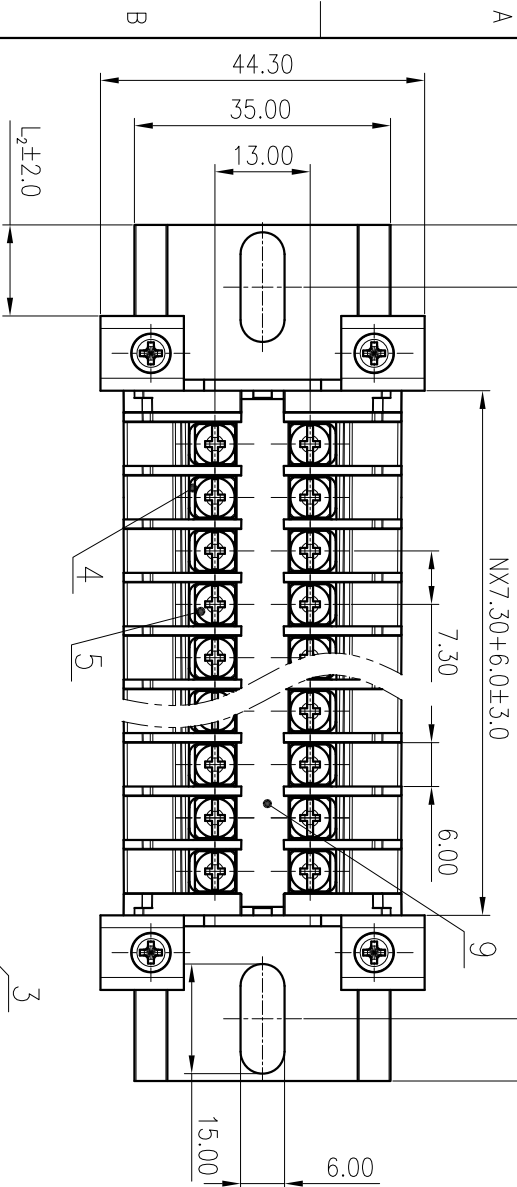

C
4:1

POLYS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
L	57	57	57	77	77	97	97	97	117	117	117	137	137	157	157	157	177	177	177	197	197
A	40	40	40	60	60	80	80	80	100	100	100	120	120	140	140	140	160	160	160	180	180
L ₂	11.65	8.0	4.35	10.70	7.05	13.40	9.75	6.10	12.45	8.80	5.15	11.50	7.85	14.20	10.55	6.90	13.25	9.60	5.95	12.30	8.65

ITEM	NAME OF PART	MATERIAL	NOTES
9	Tag	PVC	UL94V-2
8	Screw 2	Steel	Zn Plated
7	Fastener	Steel	Zn Plated
6	Tramroad	AL	/
5	Screw 1	Steel	Zn Plated
4	Current carrier	Copper alloy	Ni Plated
3	Cover	PC	UL94V-2
2	Housing 2	PC	UL94V-0
1	Housing 1	PC	UL94V-0

UL Standard: A B C D
 额定电压/电流/Rated Voltage(V)/Current(A) 600/10/6000/10/ 600/5
 螺丝扭矩/Torque Tightening(N·m/Lb·in) M3, 0.5/4.43
 线径范围(铜线)/Wire Range(Flexible)(AWG) 24~16
 间距/Pitch(mm)/线数范围/Poles 7.30/N=01~21P
 使用温度范围/Operating temperature(°C) -40~+125
 符合RoHS环保要求/Conform to RoHS Yes

SURFACE: /

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: GWG 2016.9.18

SIZE: A4

mm inch

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DGR10-XXP-1Y-10A(H)

DRAWING NO.: DGR10-C02

TYPE: CUSTOMER DRAWING

SCALE: 1:1

D

D

D

D

D

D

D

REV	ECN	DESCRIPTION	DRAFT	DATE

REV	TO