
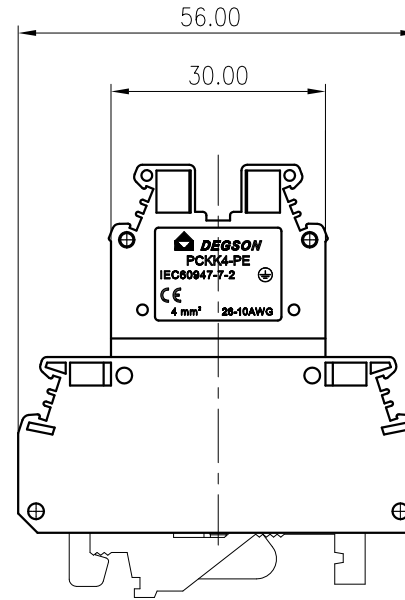
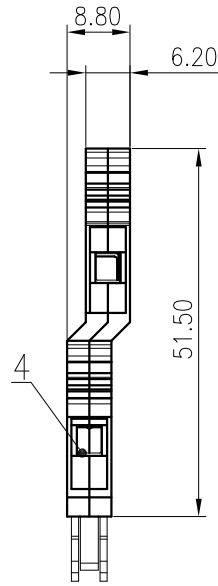
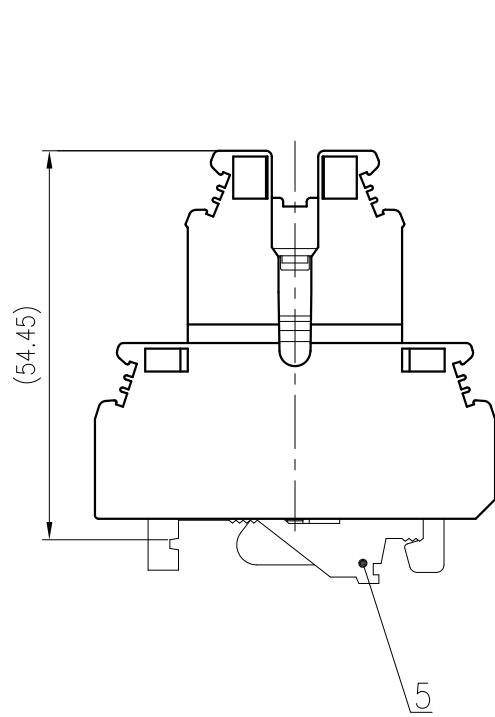


未注公差/General tolerances(mm)											0.1/10 ±2'		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

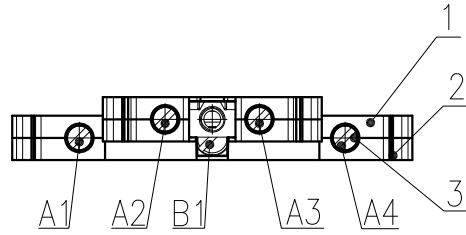

5	Assembly		
4	Cage	Copper alloy	M3/Ni Plate
3	Screw	Copper alloy	M3/Ni Plate
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		6	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)		0.2~4/26~10		
间距/Pitch(mm)/线数范围/Poles		6.20/N=01P		
剥线长度/Stripping length(mm)		9-10		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number:		PANTONE / RAL		

MATERIAL: /	SURFACE: /		
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD NAME: PCKK4-PE-01P-1Y-00A(H)		
STATUS: /			
APPD: Li GL 2020.04.17			
CHKD: Mao J 2020.04.17			
DRFT: Wang Y2 2020.04.17	DRAWING NO.: PCKK4-PE-C01	REV	T0
SIZE: A4 mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE