
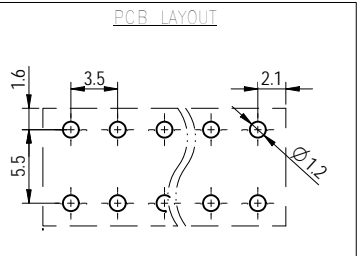
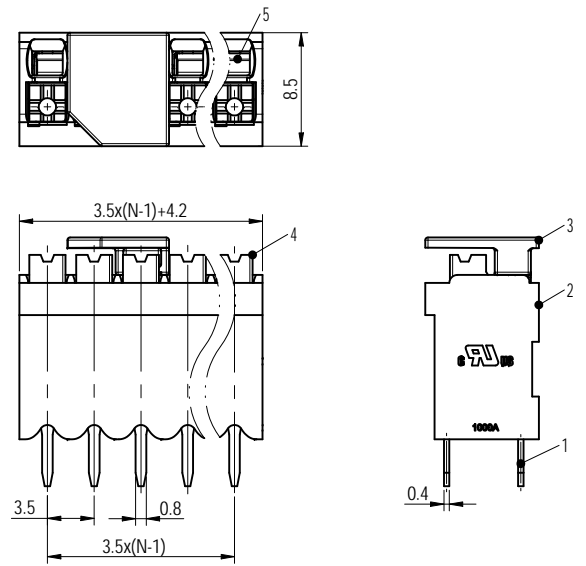

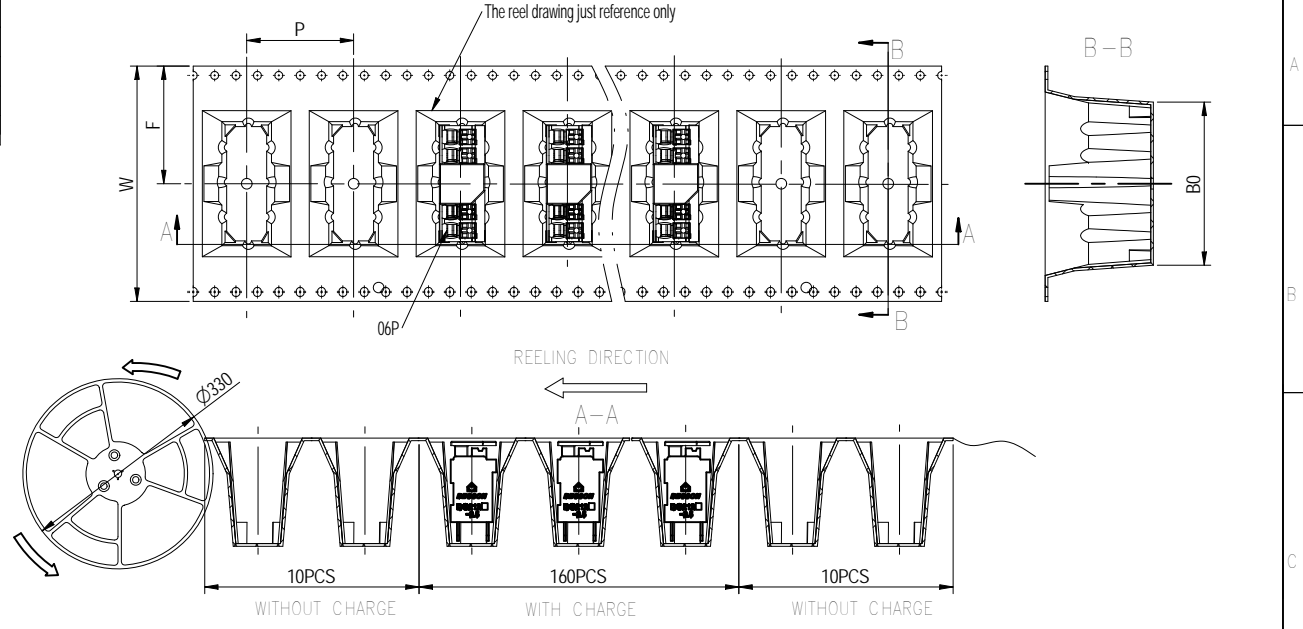


Reel Name	POLE	Width /W	Pitch /P	Width/F	Width/BO	Qty. per reel	Reel qty. per carton	Qty. per carton
DG212V-THR-3.5-02P-REEL(24)	02	24mm	20mm	13.25mm	9.5mm	160	10	1600
DG212V-THR-3.5-03P-REEL(24)	03	24mm	20mm	13.25mm	13mm	160	10	1600
DG212V-THR-3.5-04P-REEL(32)	04	32mm	20mm	14.2mm	15mm	160	8	1280
DG212V-THR-3.5-05P-REEL(44)	05	44mm	20mm	20.2mm	18.5mm	160	6	960
DG212V-THR-3.5-06P-REEL(44)	06	44mm	20mm	22mm	30.5mm	160	6	960
DG212V-THR-3.5-10P-REEL(56)	10	56mm	20mm	28mm	37.5mm	160	5	800

未注公差 (General Tolerances/mm)											D			
>3	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	±2
±0.10													±0.20	

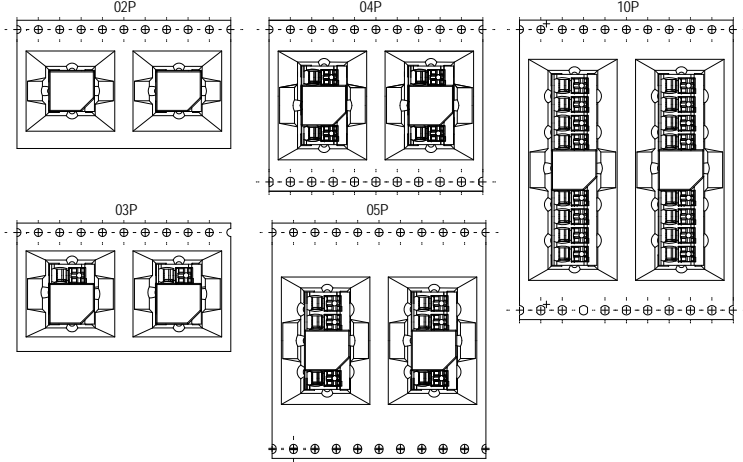

ITEM	NAME OF PART	MATERIAL	NOTES
5	Spring	Stainless steel	/
4	Button	PA66+GF	UL94V-0
3	Acetabulum	LCP	UL94V-0
2	Housing	PA10T	UL94V-0
1	Pin header	Copper alloy	Sa plated

UL 标准/UL Standard:	B	C	D
额定电压/电压 (Rated Voltage(V)/Current(A))	300/12	/	300/10
IEC 标准/IEC Standard:	B	C	D
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3	III/2	I/2
额定电压/电压 (Rated Voltage(V)/Current(A))	200/17.5	200/17.5	320/17.5
额定脉冲电压 (V)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
线径范围 (硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	28~14/ 0.2~1.5		
间距/Pitch(mm)/线数范围/ Poles	3.5(N=02~20P)		
引线长度 (Stripping length)(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+130		
符合RoHS 环保要求/Conform to RoHS	Yes		

DEGSON		MATERIAL: -	SURFACE/COLOR:
APP: 兰泰华	2022.11.07	MAT NO./REV: -	/ 00
CHKD: 陈超	2022.11.04	MAT STATUS: 小批量	

REV	ECN	DESCRIPTION	DRFT	DATE	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
00			陈超	2022.11.04	200052001	CUSTOMER DRAWING	已发布	2:1	1/1

Transfer or duplication of this document as well as the information contained herein is prohibited without the prior written consent of DEGSON. All rights reserved for patent, utility, trademark, copyright, and other intellectual property rights. 未经授权，不得复制或传播本文件及其所包含的信息。保留所有专利、商标、版权及其他知识产权。 所有权利均受法律保护。