


未注公差/General tolerances (mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
ITEM	NAME OF PART		MATERIAL		NOTES								
5	Clamp		Copper alloy		Sn Plated								
4	Screw		Steel		M3/Zn Plated								
3	Cage		Copper alloy		M3/Ni Plated								
2	Cover		PA66		UL94V-0								
1	Housing		PA66		UL94V-0								

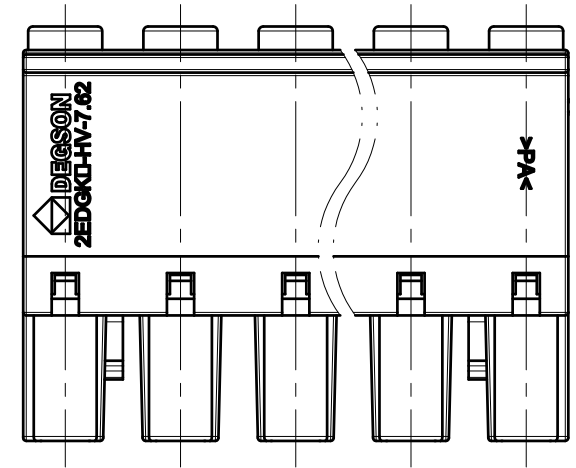

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/15	600/15	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	1000/18	1000/18	1000/18
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	8	8
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	30~12 / 0.2~2.5		
间距/Pitch(mm)/线数范围/Poles	7.62/N=02~08P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL:	SURFACE/COLOR: -		
APPD: 兰春华 2023.08.09		MAT NO./REV: - / 00	MAT STATUS: 设计放行		
CHKD: 龚耀志 2023.08.09		NAME			
DRFT: 方哲盛 2023.08.09		2EDGKA-HV-7.62-XXP-1Y-00Z (H)			
DRAWING NO. 200032300		TYPE	CUSTOMER DRAWING	DRAWING STATUS	work
SCALE 2:1		SHEET 1/1			

REV	ECN	DESCRIPTION	DRFT	DATE
00			方哲盛	2023.08.09

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by DEGSON. All rights reserved for patent. 除专利注明情况外，其他部分均不构成侵权。 未经授权，不得复制或传播本文件。 未经授权，不得复制或传播本文件。 未经授权，不得复制或传播本文件。