

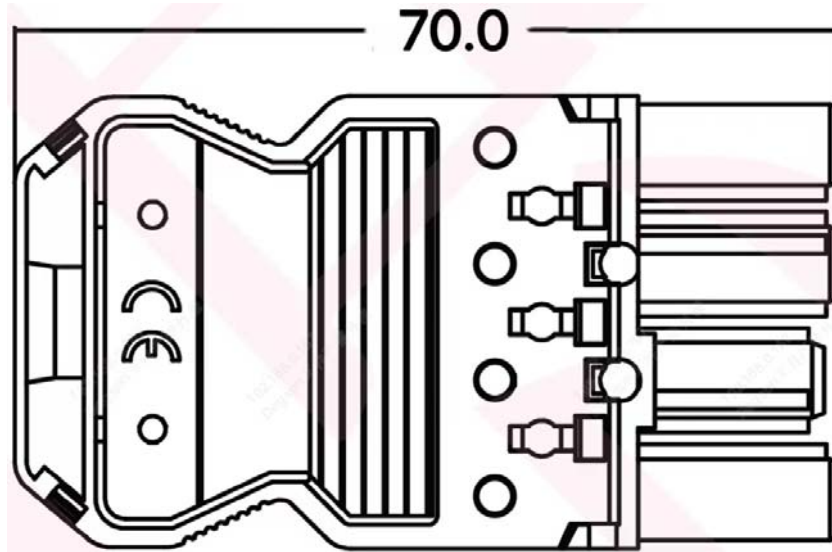


未注公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	>500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	

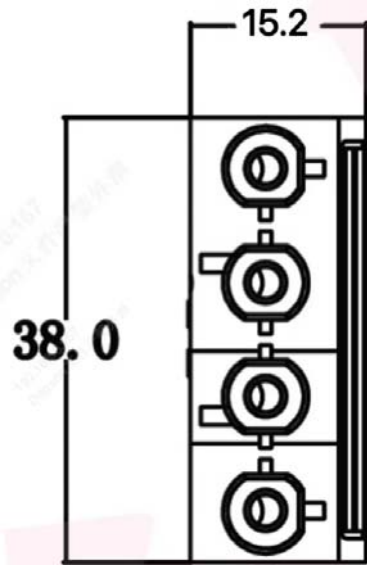

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/16	/	/
IEC 标准/IEC Standard:			
过压类别/Overtoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	400/16	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	18~14 / 0.75~2.5		
螺丝扭矩/Tightening torque(N·m/Lb.in)	M3. 0.5/4.43		
线数范围/Poles	04P		
剥线长度/Stripping length(mm)	7		
使用温度范围/Operating temperature(°C)	-40~+105		

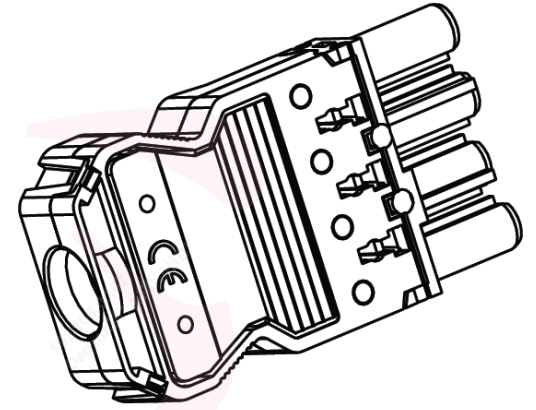

MATERIAL:	SURFACE/COLOR:
MAT NO./REV:	/ 00 MAT STATUS: 批量

APPD:	蓝贵凡	2024.05.20
CHKD:	曹利彬	2024.05.20
DRFT:	孙科豪	2024.05.20

NAME	DGBSC-PG01F/2.5-04P-13-00Z(H)				
DRAWING NO.	200123503	TYPE	CUSTOMER DRAWING	DRAWING STATUS	已发布
SCALE	2:1	SHEET	1/1		

REV	ECN	DESCRIPTION	DRFT	DATE
00				

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by DEGSON. All rights reserved for patent, utility model or design registrations. 除专利等明确标注外，其他内容均受法律保护。未经授权，不得复制或传播。 0.1/10