
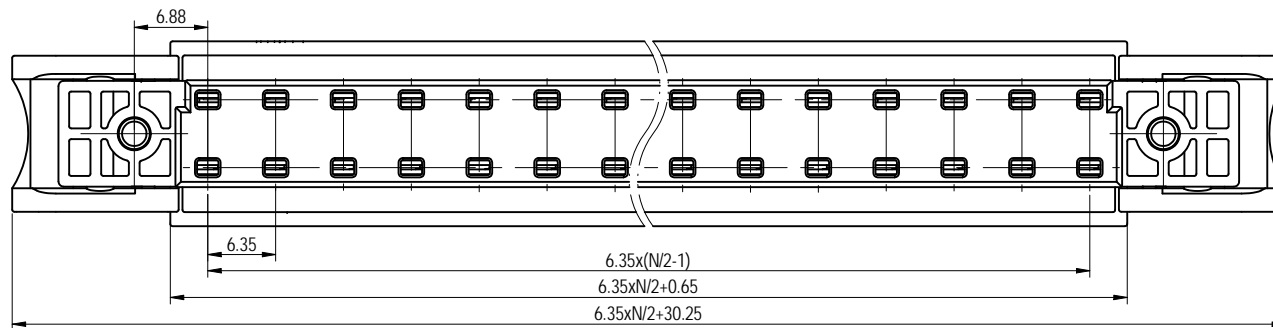
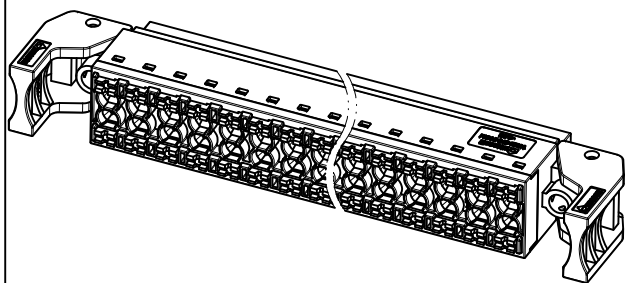
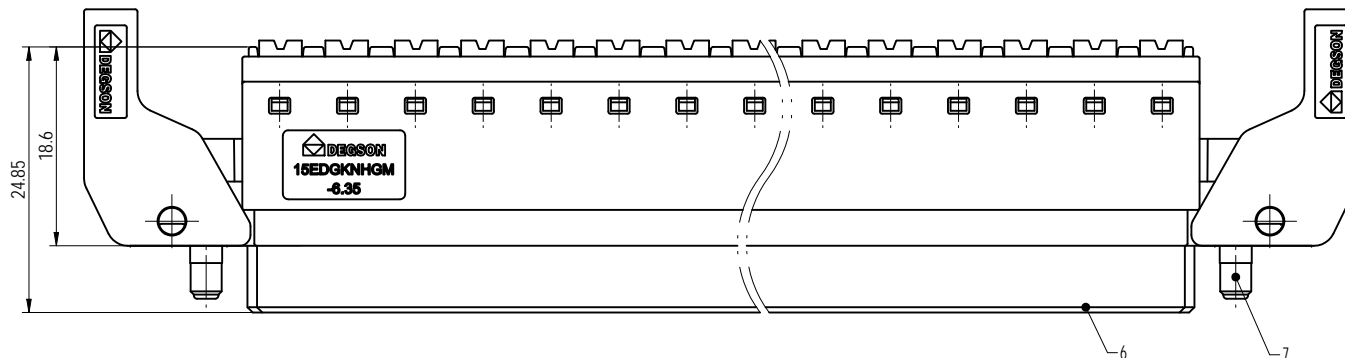

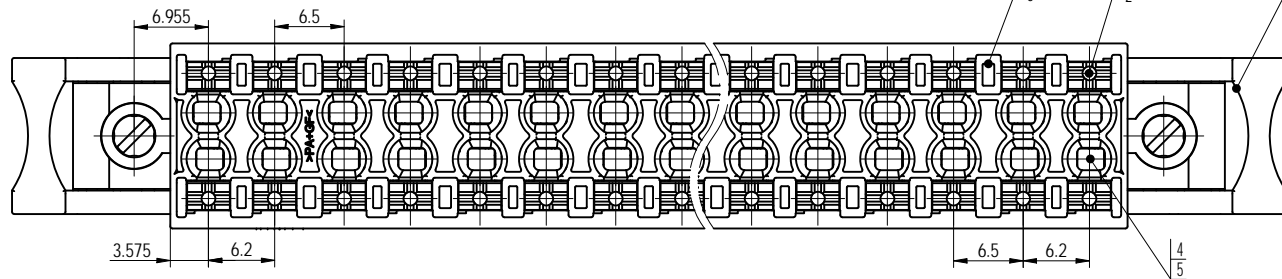


7	Screw	Steel	Zn Plated
6	Housing	PA66+GF	UL94V-0
5	Spring	Stainless steel	/
4	Clamp	Copper alloy	Sn plated
3	Cover	PA66+GF	UL94V-0
2	Button	PA66+GF	UL94V-0
1	Lever	PA66+GF	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D	公差/General tolerances (mm)												0.1/10 ±2	
额定电压/电压/Rated Voltage(V)/Current(A)	300/6	/	300/6	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400
IEC 标准/IEC Standard:				±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2														
额定电压/电压/Rated Voltage(V)/Current(A)	320/6	400/6	630/6														
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4														
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	20~16 / 0.5~1.5																
间距/Pitch(mm)/线数范围/Poles	6.35/N=28/32P																
剥线长度/Stripping length(mm)	10~12																
使用温度范围/Operating temperature(°C)	-40~+105																
符合RoHS环保要求/Conform to RoHS	Yes																

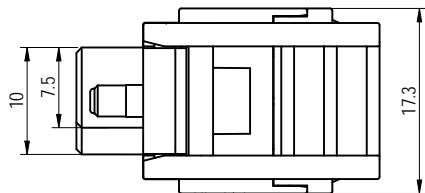

DEGSON		MATERIAL:	SURFACE/COLOR:	
APPD:		MAT NO./REV:	/ 00	MAT STATUS: 样品
CHKD:		NAME:	15EDGKNHGM-6.35-XP-1Y-00Z(H)	
DRFT:	刘强	DATE:	2024.08.20	DRAWING NO.:
				200031807
REV	ECN	DESCRIPTION	DRFT	DATE
00			刘强	2024.08.20
			刘强	2024.08.20
			A3	1/1
				1/1

Transfer or duplication of this document, as well as the utilization or reproduction of its contents without the prior written consent of DEGSON, is strictly prohibited. All rights reserved for patent.