
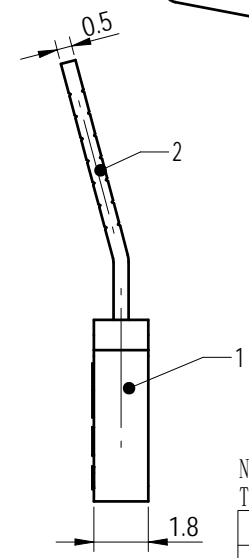
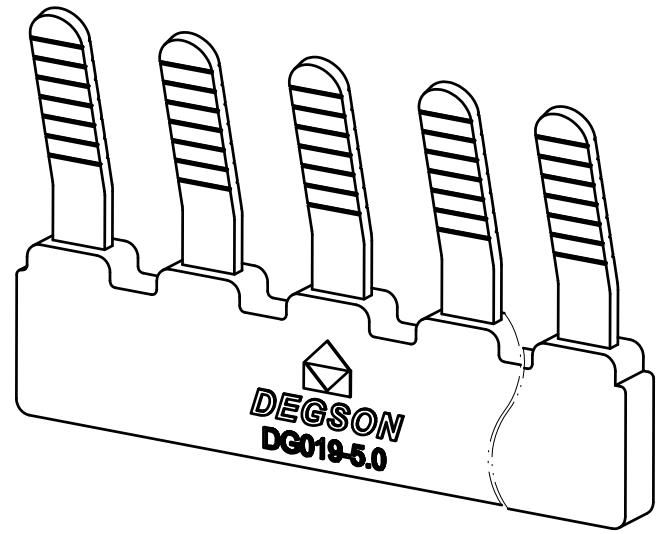


Transfer or duplication of this document as well as the utilization or communication of its content is prohibited unless authorized in writing by DEGSON. All rights reserved for patent, utility model or design registrations. 除专利等明确标注外，其他标注均归 DEGSON 所有。未经授权，不得复制或传播。 凡有复制或传播行为，均须事先获得 DEGSON 的书面许可。

公差/General tolerances (mm)													0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

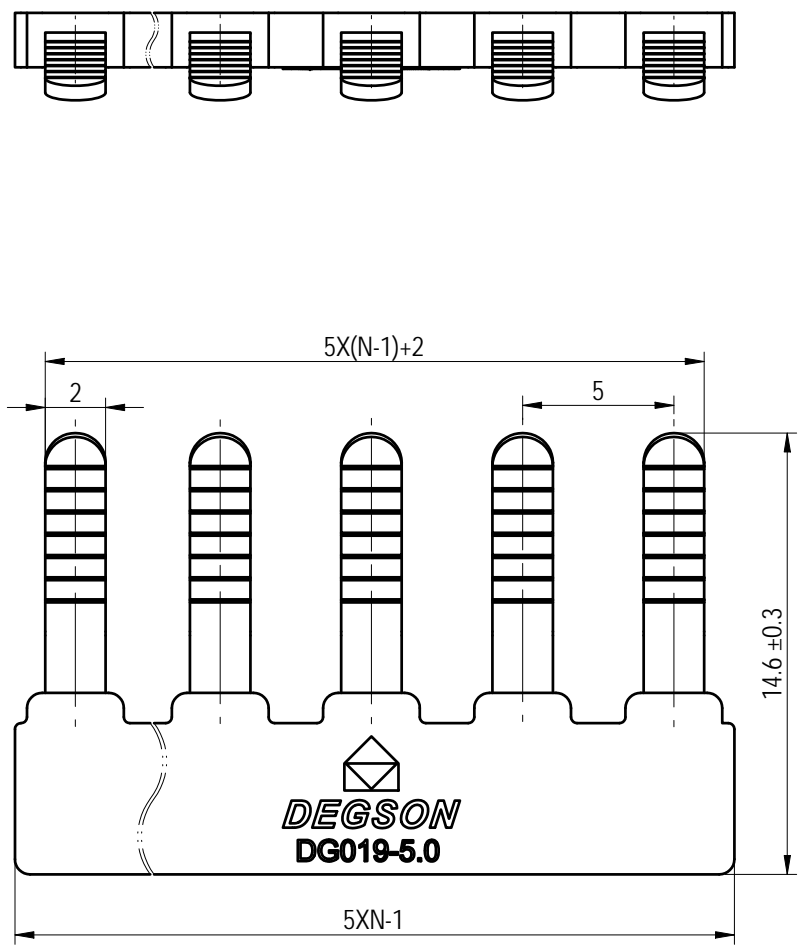

Note:
The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
2	Current_carrier	Copper_alloy	Sn_Plated
1	Housing	PA66	UL94V-0

间距/Pitch(mm)/线数范围/Poles	5.0/N=02~10P
使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes
标准颜色编号/Standard color number: PANTONE / RAL	/

DEGSON		MATERIAL: PA66	SURFACE/COLOR:	
APPD: 兰春华	2022.11.07	MAT NO./REV: -	/ 01 MAT STATUS: 批量	
CHKD: 龚耀志	2022.11.04	NAME		
DRFT: 方哲盛	2022.11.04	DGO19-5.0-XXP-1Y-00A&Z(H)		
REV	ECN	DRAWING NO.	TYPE	DRAWING STATUS
00		200019538	CUSTOMER DRAWING	已发布
DRFT	DATE	SCALE	SHEET	
方哲盛	2022.11.04	4:1	1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
00			方哲盛	2022.11.04