

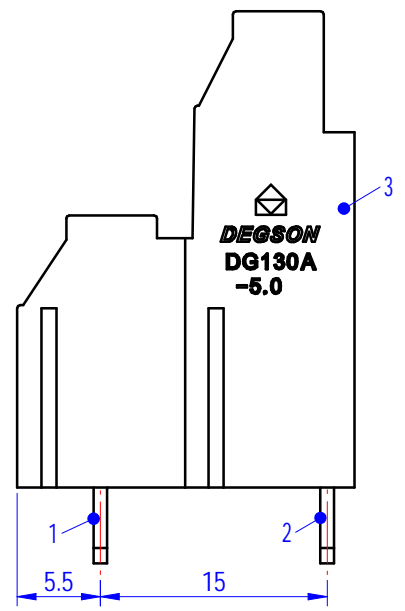
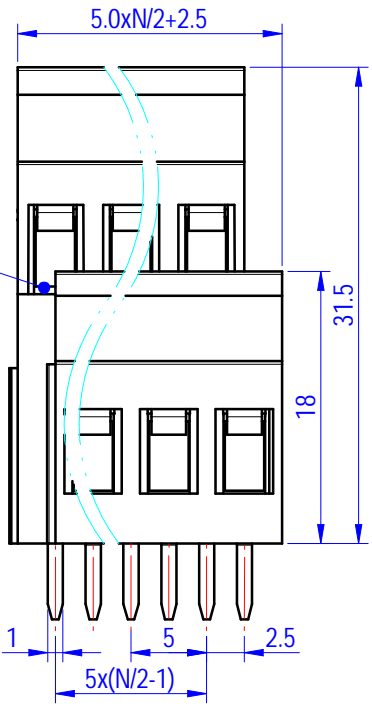
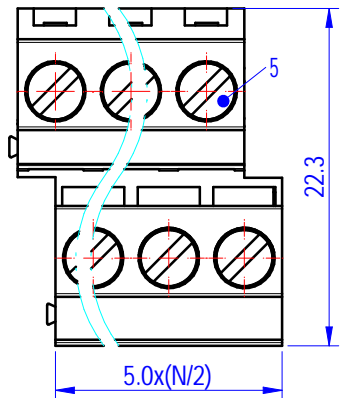


PCB LAYOUT

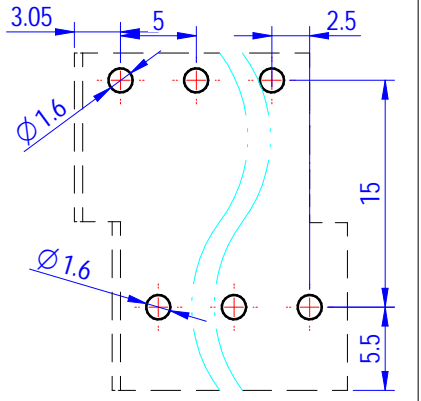

5	Screw	Steel	M3/Zn Plated
4	Cage	Copper Alloy	M3/Ni Plated
3	Housing	PA66	UL94V-0
2	Pin header 2	Copper	Sn plated
1	Pin header 1	Copper Alloy	Sn plated
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/20	/	300/10
IEC 标准/IEC Standard:				
过压类别/Ovoltage Category/污染等级/Pollution Degree		/	III/2	/
额定电压/电流/Rated Voltage(V)/Current(A)		/	450/20	/
工频耐压/Withstanding Voltage(V 1Min)		AC2000		
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG mm²)		26~ 12/ 0.5~ 2.5		
间距/Pitch(mm)/线数范围/Poles		5.0/N= 04~ 48P		
剥线长度/Stripping length(mm)		8~ 9		
使用温度范围/Operating temperature(°C)		-40~ + 105		
符合RoHS环保要求/Conform to RoHS		Yes		

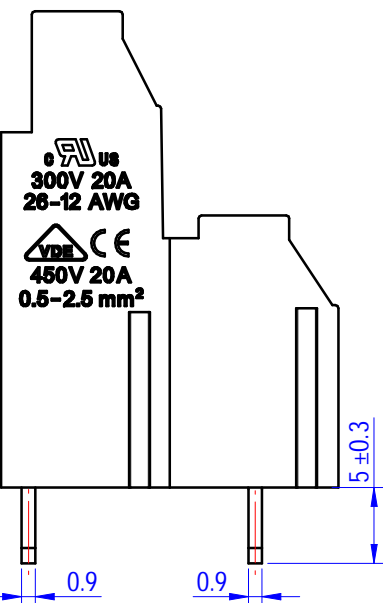

DEGSON

APPD: 兰春华 2023.10.09
 CHKD: 陈招 2023.10.09
 DRFT: 袁路易 2023.10.09

MATERIAL:		SURFACE/COLOR:			
MAT NO./REV:		/ 00		MAT STATUS: work	
NAME					
DG130A-5.0-XXP-1Y-00A&Z(H)					
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET	
200100406	CUSTOMER DRAWING	已发布	2:1	1/1	

01		更正PCB板前后脚中心距尺寸	袁路易	2023.10.09
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in general. Violations will be treated for compensation. All rights reserved for patent. Utility model or design registrations. 除专利证明外，其他任何形式之复制、发行、出租、出借、充诸本文件之内容，均视为侵权。本公司保留对涉及发明、实用新型及外观设计之专利权。 未经授权，不得复制或传播本文件内容。 违者必究。