
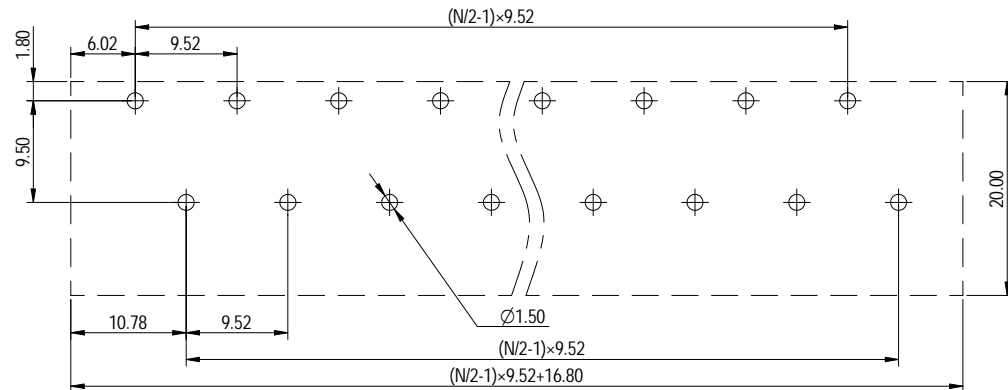
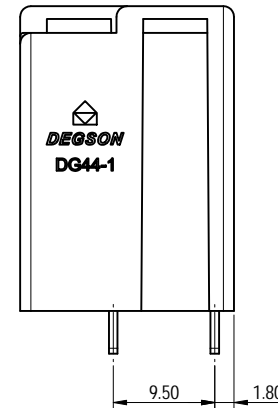
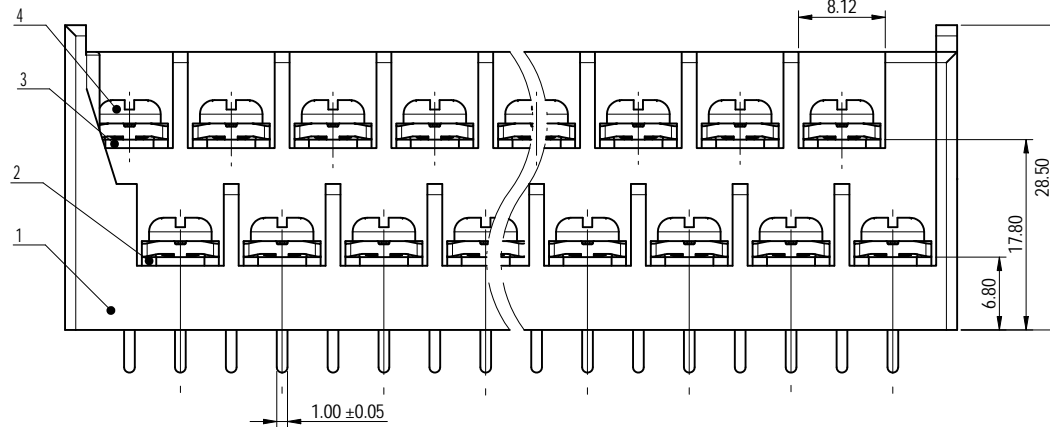
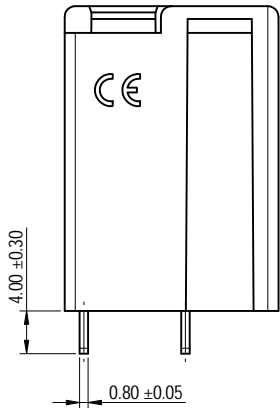


公差/General tolerances (mm)											D 0.1/10			
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400	>500
~	3	6	10	18	30	50	80	120	180	250	315	400	500	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2

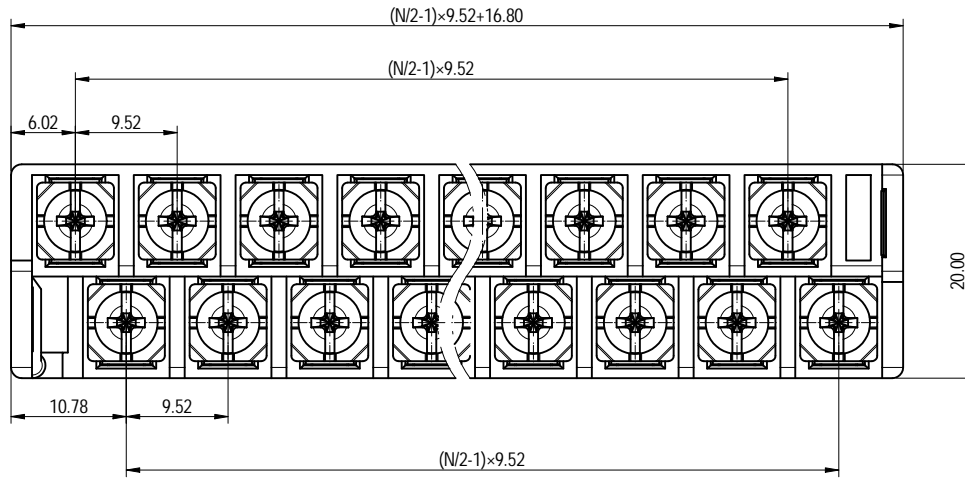

Note: The A&Z (H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES	
4	Screw	Steel	Zn Plated	
3	Pin header 2	Copper alloy	Sn Plated	
2	Pin header 1	Copper alloy	Sn Plated	
1	Housing	PBT	UL94V-0	
UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)		300/20	/	/
螺丝扭矩/Torque Tightening(N·m/Lb·in)		M3.5, 1.4/12.40		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)		18~12		
间距/Pitch(mm)/线数范围/Poles		9.52/N=04~20P		
使用温度范围/Operating temperature(°C)		-30~+120		
符合RoHS环保要求/Conform to RoHS		Yes		

DEGSON		MATERIAL:		SURFACE/COLOR:	
APPD: 廖美凡	2023.06.12	MAT NO./REV:	- / 00	MAT STATUS:	批量
CHKD: 曹利影	2023.06.12	NAME			
DG44-1-XXP-1Y-00A&Z(H)					
DRFT: 姜民洁	2023.06.12	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
A3		200198009	CUSTOMER DRAWING	已发布	1:1
REV		ECN	DESCRIPTION	DRFT	DATE
00					

Transfer or duplication of this document as well as the utilization of its contents without the written permission of DEGSON is prohibited. All rights reserved for patent.